

3019 Rec'd PCT/PTO 14 JUN 2001

FORM PTO-1390 (Modified)
(REV 11-2000)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

**TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371**

30394-1049

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR 1.5)

09/868408

INTERNATIONAL APPLICATION NO.
PCT/NL99/00786

INTERNATIONAL FILING DATE
17 December 1999 (17.12.99)

PRIORITY DATE CLAIMED
17 December 1998 (17.12.98)

TITLE OF INVENTION

METHOD OF THE DOSED APPLICATION OF A LIQUID ONTO A SURFACE

APPLICANT(S) FOR DO/EO/US

Robert MOERMAN

Johannes FRANK

Johannes Cornelis Maria MARIJNISSEN

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (24) indicated below.
4. ☒ The US has been elected by the expiration of 19 months from the priority date (Article 31).
5. ☒ A copy of the International Application as filed (35 U.S.C. 371 (c) (2))
 - a. ☐ is attached hereto (required only if not communicated by the International Bureau).
 - b. ☒ has been communicated by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).
 - a. ☐ is attached hereto.
 - b. ☒ has been previously submitted under 35 U.S.C. 154(d)(4).
- ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))
 - a. ☐ are attached hereto (required only if not communicated by the International Bureau).
 - b. ☒ have been communicated by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☐ have not been made and will not be made.
- ☐ An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
- ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).
- ☐ An English language translation of the annexes of the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).
11. ☒ A copy of the International Preliminary Examination Report (PCT/IPEA/409).
12. ☒ A copy of the International Search Report (PCT/ISA/210).

Items 13 to 20 below concern document(s) or information included:

13. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
14. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
15. ☒ A **FIRST** preliminary amendment.
16. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
17. ☐ A substitute specification.
18. ☐ A change of power of attorney and/or address letter.
19. ☐ A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825.
20. ☐ A second copy of the published international application under 35 U.S.C. 154(d)(4).
21. ☐ A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).
22. ☒ Certificate of Mailing by Express Mail
23. ☒ Other items or information:

**Unsigned Declaration and Power of Attorney for Patent Application
Associate Power of Attorney
Transmittal of Formal Drawings**

ATTORNEY'S DOCKET NUMBER

30394-1049

24. The following fees are submitted:

BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)) :

- | | |
|--|------------------|
| <input type="checkbox"/> Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO | \$1000.00 |
| <input checked="" type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO | \$860.00 |
| <input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO | \$710.00 |
| <input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4) | \$690.00 |
| <input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4) | \$100.00 |

ENTER APPROPRIATE BASIC FEE AMOUNT =

\$860.00

Surcharge of \$130.00 for furnishing the oath or declaration later than
months from the earliest claimed priority date (37 CFR 1.492 (e)). ☐ 20 ☐ 30

\$0.00

CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE
Total claims	20 - 20 =	0	x \$18.00
Independent claims	1 - 3 =	0	x \$80.00

Multiple Dependent Claims (check if applicable).

\$0.00

TOTAL OF ABOVE CALCULATIONS =

\$860.00

- ☒ Applicant claims small entity status. (See 37 CFR 1.27). The fees indicated above are reduced by 1/2.

\$430.00

SUBTOTAL =

\$430.00

Processing fee of **\$130.00** for furnishing the English translation later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1.492 (f)).

\$0.00

TOTAL NATIONAL FEE =**\$430.00**

Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable).

\$0.00

TOTAL FEES ENCLOSED =

\$430.00

Amount to be:
refunded

20

charged

9

- a. ☒ A check in the amount of \$430.00 to cover the above fees is enclosed.
- b. ☐ Please charge my Deposit Account No. _____ in the amount of _____ to cover the above fees.
A duplicate copy of this sheet is enclosed.
- c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 13-4213 A duplicate copy of this sheet is enclosed.
- d. ☐ Fees are to be charged to a credit card. **WARNING:** Information on this form may become public. **Credit card information should not be included on this form.** Provide credit card information and authorization on PTO-2038.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

CUSTOMER NO. 005179

Peacock, Myers & Adams, P.C.
Post Office Box 26927
Albuquerque, New Mexico 87125-6927
Telephone (505) 998-1500
FAX (505) 243-2542

~~SIGNATURE~~

Jeffrey D. Myers

NAME _____

35,964

REGISTRATION NUMBER

14 June 2001

DATE _____

CERTIFICATE OF MAILING BY "EXPRESS MAIL" (37 CFR 1.10)Applicant(s): **Robert MOERMAN, et al.**

Docket No.

30394-1049

Serial No.

Filing Date

Examiner

Group Art Unit

09/868408**HEREWITH (14 June 2001)**

Invention:


METHOD OF THE DOSED APPLICATION OF A LIQUID ONTO A SURFACE

I hereby certify that the following correspondence:

Transmittal Letter under 35 USC 371 with associated papers and \$430 fee check

(Identify type of correspondence)

is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 in an envelope addressed to: The Assistant Commissioner for Patents, Washington, D.C. 20231


14 June 2001*(Date)***Annette M. Turk, Legal Assistant***(Typed or Printed Name of Person Mailing Correspondence)**(Signature of Person Mailing Correspondence)***EL762005761US***("Express Mail" Mailing Label Number)***Note: Each paper must have its own certificate of mailing.**

09/868408

PATENT APPLICATION

I hereby certify that this paper is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 via Label No. EL762005761US on 14 June 2001, addressed to Box: PCT, Commissioner for Patents, Washington, D.C. 20231.

JC03 Rec'd PCT/PTC 14 JUN 2001


Annette M. Turk, Legal Assistant

14 June 2001
Date Signed

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant(s):	Robert MOERMAN, et al.	:
Serial No.:	UNKNOWN	: Attorney Docket No.: 30394-1049
Filed:	HEREWITH (14 June 2001)	:
For:	METHOD OF THE DOSED APPLICATION OF A LIQUID ONTO A SURFACE	:

FIRST PRELIMINARY AMENDMENT

Box: PCT
Commissioner for Patents
Washington, D.C. 20231

Sir:

Please amend the application, without prejudice, as follows:

In the Claims:

Amend the claims as follows:

1. (Amended) A method of the dosed application of a liquid onto a surface of a substrate, wherein the liquid is fed to a distal tip of a capillary at a flow rate between 0.01 pl/s to 1 ml/s, wherein the distal tip comprises an orifice directed toward a surface, the inside diameter of the capillary is less than 150 μ m and a voltage is applied between the orifice and a counter electrode until the desired amount of liquid has been applied to a selected portion of the surface, wherein the distance between the orifice and the surface is less than 2 mm.
2. (Amended) A method according to claim 1, wherein as substrate an object for performing an assay is used.

3. (Amended) A method according to claim 1, wherein the liquid comprises a biological particle selected from the group consisting of a single-cell organism, an enzyme, a probe for the detection of nucleic acid sequence, an enzyme, a receptor and a ligand.
4. (Amended) A method according to claim 3, wherein as the receptor an antibody is used.
5. (Amended) A method according to claim 1, wherein the flow rate varies between 1 pl/s and 1 nl/s.
6. (Amended) A method according to claim 1, wherein the distance between the orifice and the surface is 200 to 1000 μm .
7. (Amended) A method according to claim 1, wherein the selected portion of the surface is bounded by means for limiting [the] spreading of the liquid over the surface.
8. (Amended) A method according to claim 7, wherein a substrate is used whose surface comprises a well with the selected portion being comprised of the bottom of the well, wherein a wall of the well contains spreading of the liquid over the surface.
9. (Amended) A method according to claim 7, wherein the means for limiting is a barrier selected from the group consisting of a hydrophilic barrier and a hydrophobic barrier.
10. (Amended) A method according to claim 7, wherein as means for limiting a charged barrier is used having a charge whose sign is the same as that of the liquid applied to the surface.

11. (Amended) A method according to claim 1, wherein the application is performed in an atmosphere substantially saturated with vapor from the liquid.

12. (Amended) A method according to claim 1, wherein the application is performed in an atmosphere, which, in comparison with atmospheric air, reduces chance of discharge.

13. (Amended) A method according to claim 1, wherein after the application of the liquid onto the selected portion of the surface, the substrate and the orifice are moved in relation to each other in a plane extending substantially perpendicular to the axis of the capillary, and in that a second selected portion of the surface is provided with liquid, which second selected portion does not overlap with the selected portion first provided with liquid.

14. (Amended) A method according to claim 1, wherein an array of capillaries is used with the capillaries spaced from each other such that the selected surfaces onto which liquid is to be applied by two adjacent capillaries, do not overlap.

15. (Amended) A method according to claim 1, wherein the counter electrode is formed by the substrate.

16. (Amended) A method according to claim 1, wherein an electrode is used as counter electrode, which electrode substantially surrounds the selected portion of the surface and which is retained in vicinity to the surface.

17. (Amended) A method according to claim 1, wherein the amount of applied liquid is measured by means of one or more characteristics from the group consisting of current and voltage characteristics.

18. (Amended) A method according to claim 1, wherein a gelling liquid is applied to the selected portion of the surface.

19. (Amended) A method according to claim 1, wherein the counter electrode is applied underneath the selected surface and is covered with a substantially insulating thin film.

20. A method according to claim 5 wherein the flow rate varies between 10 and 100 pl/s.

20230901

REMARKS

The foregoing amendment to the claims is being offered in a format acceptable to the U.S. Patent and Trademark Office. The amendment of the title and specification occurred during the Chapter II phase; and amendment of the claims during the Chapter II phase of the corresponding PCT application are incorporated herein. No new matter is presented by this Amendment. Entry of this amendment by the Examiner is respectfully requested.

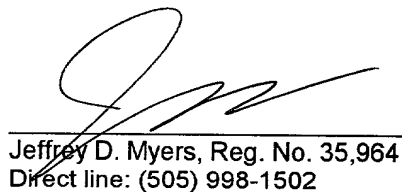
Attached hereto is a marked-up version of the changes made to the claims by the current amendment. The attached paper is captioned "**Version with Markings to Show Changes Made.**"

Authorization is given to charge payment of any fees required, or credit any overpayment, to Deposit Acct. 13-4213. A duplicate of this paper is enclosed for accounting purposes.

Respectfully submitted,

Dated: 14 June 2001

By:


Jeffrey D. Myers, Reg. No. 35,964
Direct line: (505) 998-1502

PEACOCK, MYERS & ADAMS, P.C.
Attorneys for Applicant(s)
P.O. BOX 26927
Albuquerque, New Mexico 87125-6927

Telephone: (505) 998-1500
Facsimile: (505) 243-2542

Version with Markings to Show Changes Made

1. (Amended) A method of the dosed application of a liquid onto a surface of a substrate, wherein the liquid is fed to a distal tip of a capillary at a flow rate between [0,01 pl/s and 1 ml/s] 0.01 pl/s to 1 ml/s, wherein the distal tip comprises an orifice directed toward a surface, the inside diameter of the capillary is less than 150 μm and a voltage is applied between the orifice and a counter electrode until the desired amount of liquid has been applied to [the] a selected portion of the surface, [characterized in that] wherein the distance between the orifice and the surface is less than 2 mm.

2. (Amended) A method according to claim 1, [characterized in that] wherein as substrate an object for performing an assay is used.

3. (Amended) A method according to claim 1 [or 2, characterized in that] , wherein the liquid comprises a biological particle selected from the group consisting of a single-cell organism, an enzyme, a probe for the detection of nucleic acid sequence, an enzyme, a receptor and a ligand.

4. (Amended) A method according to claim 3, [characterized in that] wherein as the receptor an antibody is used.

5. (Amended) A method according to claim 1, [one of the preceding claims, characterized in that] wherein the flow rate varies between 1 pl/s and 1 nl/s[, and preferably between 10 and 100 pl/s].

6. (Amended) A method according to claim 1, [one of the preceding claims, characterized in that] wherein the distance between the orifice and the surface is 200 to 1000 μm .

7. (Amended) A method according to claim 1, [one of the preceding claims, characterized in that] wherein the selected portion of the surface is bounded by means for limiting [the] spreading of the liquid over the surface.

8. (Amended) A method according to claim 7, [characterized in that] wherein a substrate is used whose surface comprises a well with the selected portion being comprised of the bottom of the well, wherein a wall of the well contains [the] spreading of the liquid over the surface.

9. (Amended) A method according to claim 7 [or 8, characterized in that] , wherein the means [to avoid the liquid spreading over the surface] for limiting is a barrier selected from the group consisting of [i)] a hydrophilic barrier and [ii)] a hydrophobic barrier.

10. (Amended) A method according to claim 7, [one of the claims 7 to 9, characterized in that] wherein as means for limiting a charged barrier is used having a charge whose sign is the same as that of the liquid applied to the surface.

11. (Amended) A method according to claim 1, [one of the preceding claims, characterized in that] wherein the application is performed in an atmosphere substantially saturated with vapor [vapour] from the liquid.

12. (Amended) A method according to claim 1, [one of the preceding claims, characterized in that] wherein the application is performed in an atmosphere, which, in comparison with atmospheric air, reduces [the] chance of discharge.

13. (Amended) A method according to claim 1, [one of the preceding claims, characterized in that] wherein after the application of the liquid onto the selected portion of the surface, the substrate and the orifice are moved in relation to each other in a plane extending substantially perpendicular to the axis of the capillary, and in that a second selected portion of the surface is provided with liquid, which second selected portion does not overlap with the selected portion first provided with liquid.

14. (Amended) A method according to claim 1, [one of the preceding claims, characterized in that] wherein an array of capillaries is used with the capillaries spaced from each other such that the selected surfaces onto which liquid is to be applied by two [neighbouring] adjacent capillaries, do not overlap.

15. (Amended) A method according to claim 1, [one of the preceding claims, characterized in that] wherein the counter electrode is formed by the substrate.

16. (Amended) A method according to claim 1, [one of the claims 1-13, characterized in that] wherein an electrode is used as counter electrode, which electrode substantially surrounds the selected portion of the surface and which is retained in [the] vicinity [of] to the surface.

17. (Amended) A method according to claim 1, [one of the preceding claims, characterized in that] wherein the amount of applied liquid is measured by means of one or more characteristics from the group consisting of current and[/or] voltage characteristics.

18. (Amended) A method according to claim 1, [one of the preceding claims, characterized in that] wherein a gelling liquid is applied to the selected portion of the surface.


19. (Amended) A method according to claim 1, [one of the preceding claims, characterized in that] wherein the counter electrode is applied underneath the selected surface and is covered with a substantially insulating thin film.

Please add a new claim as follows:

-- 20. A method according to claim 5 wherein the flow rate varies between 10 and 100 pl/s.--

PATENT APPLICATION

I hereby certify that this paper is being deposited with the United States Postal Service
"Express Mail Post Office to Addressee" service under 37 CFR 1.10 via Label
No. EL762005761US on 14 June 2001, addressed to Box: PCT, Commissioner for Patents,
Washington, D.C. 20231.


Annette M. Turk, Legal Assistant

14 June 2001
Date Signed

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant(s):	Robert MOERMAN, et al.	:
Serial No.:	UNKNOWN	: Attorney Docket No.: 30394-1049
Filed:	HEREWITH (14 June 2001)	: Anticipated Group Art Unit: UNKNOWN
For:	METHOD OF THE DOSED APPLICATION OF A LIQUID ONTO A SURFACE	:

ASSOCIATE POWER OF ATTORNEY

Box: PCT
Commissioner for Patents
Washington, D.C. 20231

Dear Sir:


Jeffrey D. Myers, a principal attorney in the above-identified application for Letters Patent, hereby
appoints:

Deborah A. Peacock, Reg. No. 31,649
Paul Adams, Reg. No. 21,096
Rod D. Baker, Reg. No. 35,434
Andrea L. Mays, Reg. No. 43,721; and
Stephen A. Slusher, Reg. No. 43,924

as associate attorneys with full power.

Respectfully submitted,

Date: 14 June 2001


Jeffrey D. Myers, Reg. No. 35,964
Direct line: (505) 998-1502

Attorney for Applicant(s)
PEACOCK, MYERS & ADAMS, P.C.
P.O. Box 26927
Albuquerque, New Mexico 87125-6927
Telephone: (505) 998-1500
Facsimile No. (505) 243-2542
Customer No. 005179

[\\JDM\DOCS\Los&Stigter-APOA.PTO.doc] 30394-1049

ART 34 AMBT

28. 12. 2000

WO 800126-A1/lm/ho

(60)

Method of the dosed application of a liquid onto a surface

The present invention relates to a method of the dosed application of a liquid onto a surface of a substrate, wherein the liquid is fed to a distal tip of a capillary at a flow rate between 0,01 pl/s and 1 ml/s, wherein the distal tip comprises an orifice directed toward a surface, the inside diameter of the capillary is less than 150 μ m and a voltage is applied between the orifice and a counter electrode until the desired amount of liquid has been applied to the selected portion of the surface.

WO 98/58745 describes a method of electrospraying solutions to deposit substances, including biomacromolecules, in the form of spots and films on a substrate. Electrospraying occurs at a distance from the substrate of 15-40 mm. The application describes a focusing technique to create small spots of deposited material. This document was published after the priority date of the present application.

The present invention is characterized in that the distance between the orifice and the surface is less than 2 mm.

Surprisingly, applicant has found that by means of the electrospraying technique it is possible to apply liquid to a very small selected portion (having a (maximum) diameter of 1 cm or less) without any substantial amount of liquid landing outside of said selected portion. This will also not happen when application times are longer. Then a drop will form, without adversely affecting of the method.

EP-A-0,258,016 describes an electrostatic coating system suitable for applying a very thin coating to a substrate wherein, by means of a potential difference, a coating liquid is reduced to a mist of highly charged droplets, which charged droplets are drawn toward the substrate. Because the charged droplets have the same sign, they repel each other whereby a substantially even coating of the surface is achieved.

1a

The term "capillary" as used in the present application, is understood to define any conduit that makes it possible to allow an aqueous liquid to pass through, and

Page 2 →

when mention is made of the width of a capillary, this (obviously) relates to the inside diameter of the conduit.

When speaking of the inside diameter of the capillary, this relates in particular to the inside diameter of the distal tip directed toward the substrate.

When speaking of the application of a voltage between the orifice and a counter electrode, then this comprises, as will be obvious to the person skilled in the art, the application of a voltage between the liquid in an electrically non-conductive orifice of the capillary and the counter electrode.

In this manner it is possible to apply liquid to a limited surface having a defined dimension.

This makes the method according to the present invention very suitable, for example, for the dosed application of a liquid to an object for performing an assay. The object may, for example, be a microtitre plate; a substrate such as can be manufactured using techniques known from the semiconductor industry, for example substrates based on silicon, and the like.

For performing an assay the liquid preferably comprises a biological particle selected from an unicellular organism, an enzyme, a probe for the detection of a nucleic acid sequence, an enzyme, a receptor and a ligand. It is also conceivable that small multi-cellular organisms and tissues are applied with the liquid, on condition that the inside diameter of the capillary permits this.

As probe for the detection of a nucleic acid sequence, an oligonucleotide such as well-known in the field, may conveniently be used. In the present application, receptor is understood to mean a ligand-specific protein. Such a receptor may, for example, be a membrane receptor. According to a very favourable embodiment the receptor is an antibody. Advantageously, at least the selected portion of the surface of the substrate is capable of covalently coupling the biological particle.

According to a favourable embodiment the application is performed in an atmosphere substantially saturated with vapour from the liquid.

This reduces the chance of Rayleigh-break up of charged droplets, and thus helps to avoid that liquid lands outside of the selected portion of the surface.

According to a further embodiment, application is performed in an atmosphere which, in comparison with atmospheric air, reduces the chance of discharge.

Therefore, as long as a possible biological activity of a biological particle present in the liquid is substantially not adversely affected, the chance of damage to the substrate may be reduced by using, for example, a nitrogen-depleted atmosphere. Compared with air, the atmosphere preferably comprises a relatively high content of one or more gasses having a relatively high electron affinity. For example, the atmosphere suitably comprises SF₆ or an elevated CO₂ content.

A very important embodiment of the method according to the present invention is characterized in that after the application of the liquid onto the selected portion of the surface, the substrate and the orifice are moved in relation to each other in a plane extending substantially perpendicular to the axis of the capillary, and in that a second selected portion of the surface is provided with liquid, which second selected portion does not overlap with the selected portion first provided with liquid.

Instead, or in addition, it is preferred to use an array of capillaries, with the capillaries spaced from each other such that the selected surfaces onto which liquid is to be applied by two neighbouring capillaries, do not overlap.

With the aid of such methods it is possible to select a large number of non-overlapping portions on the substrate, allowing many assays to be performed simultaneously.

According to a first embodiment the counter electrode is being formed by the substrate.

In such a case the substrate comprises a conductor or semiconductor, or the same have been applied to the substrate.

According to an alternative embodiment an electrode is used as counter electrode, which electrode substantially surrounds the selected portion of the surface and which is kept in the vicinity of the surface. In the present application the term "in the vicinity of the surface" is understood to mean adjacent or at a distance from the surface, on the understanding that in the latter case, the counter electrode is normally located at less than half the distance between the tip of the capillary and the substrate.

The advantage of this embodiment is that non-conductive substrates such as, for example, microtitre plates of polystyrene, can be provided with liquid with the aid of the method according to the present invention. This allows substrates having elevated concentrations of, for example antibodies, to be coated quickly without raising the costs resulting from wasting the starting material, since only small volumes of liquid are applied to the surface.

According to an interesting embodiment, the amount of applied liquid is measured by means of current and/or voltage characteristics.

This allows the dosage of the liquid to be monitored in time.

According to a preferred embodiment the flow rate varies between 1 pl/s and 1 nl/s, and preferably between 10 and 100 pl/s.

Such flow rates are very suitable for the application of minuscule amounts of liquid to a very small portion of the surface of the substrate. One might consider a portion having a surface area of 1 mm² or less, and in particular 0,1 mm² or less.

When applying liquid to a small selected portion having a surface area of 1 mm² or less, the distance between the orifice and the surface is, according to an advantageous embodiment, 200 to 1000 μm.

According to a favourable embodiment the selected portion of the surface is bounded by means for limiting the spreading of liquid over the surface.

In this way a substantially homogeneous coating of liquid is obtained on the selected portion and the chance of liquid landing outside the selected portion is reduced.

According to a first embodiment a substrate is used
5 whose surface comprises a well with the selected portion being comprised of the bottom of the well, wherein a wall of the well contains the spreading of the liquid over the surface.

According to a second embodiment the means to avoid
10 the liquid spreading over the surface is a barrier selected from i) a hydrophilic barrier and ii) a hydrophobic barrier. In the case of a polar liquid, a hydrophobic barrier is used and with an a-polar liquid a hydrophilic one.

15 A further means that can be used is a charged barrier having a charge whose sign is the same as that of the liquid applied to the surface.

According to an alternative and/or additional
embodiment the selected area to which liquid is to be
20 applied may be provided with an agent promoting the spreading over the surface of the selected area. This could be a sugar or a surface-active agent. For example, the agent may be applied by means of pressure technique. This helps to ensure that the liquid will indeed cover the
25 selected area. This is particularly important in cases where the selected area is not round, especially when it is angular such as a rectangle.

The present invention will now be explained with reference to the drawings in which

30 Fig. 1 shows a device for performing the method according to the present invention;

Fig. 2 shows a detail of an alternative embodiment;
and

Fig. 3 shows a different embodiment of a device for
35 the application of the method according to the invention.

Fig. 1 shows a capillary 1 having a first tip 2 and a second tip 3. The first tip 2 is in communication with a 25 microliter Hamilton syringe 4. This syringe 4 contains the liquid, in the present case 0.3 M NaCl in an ethylene

glycol-water mixture (70/30 vol.%/vol.%) to be applied to a substrate A. In the embodiment shown, the piston 5 of the syringe 4 is moved by a Harvard PHD 2000 infusion pump 6 (Antec, Leiden, the Netherlands). The infusion pump 6 moves the liquid B to the distal tip 3 of the capillary 1. The capillary 1 used here, has an inside diameter of 110 μm and an outside diameter of 210 μm . In the embodiment presented, the capillary 1 is made of metal.

The substrate A schematically shown in Fig. 1, is a semiconducting silicon micro-array having 25 wells formed by means of wet-etching, employing well-known techniques used in the semiconductor industry. The wells were rectangular with sides of 200 μm . The depth was 20 μm . The (semi)conducting substrate A is supported by a metal plate 7. The capillary 1 is connected with the positive electrode of a high voltage source 9 (HCN 12500, Air Parts, Alphen aan de Rijn, the Netherlands) via a metal holder 8, which may also comprise more than one capillary.

From the distal tip 3 of the capillary 1, the surface tension may be overcome by means of the high voltage of, for example, 1 - 2 kilovolt applied by means of the power source 9, resulting in extremely small droplets being moved from the second tip 3 to the substrate A, and more specifically to a well C provided therein. A well may be filled with more than one liquid, so that an assay can be performed in a very small reaction volume.

Before applying the potential difference, superfluous liquid around the distal tip 3 is removed. Fig. 2 shows how a portion of the substrate A is coated with the liquid. The distal tip 3 of the capillary 1 (an outside diameter of 210 μm and an inside diameter of 110 μm) was positioned at a distance of 400 - 450 μm from the surface of the substrate A. A voltage of 1.45 kV was applied and the flow rate of the pump was 50 pl/s. When spraying 2 - 40 seconds, the diameter of the portion of the surface coated with liquid was 300 - 350 μm . Table I shows the results of measurement for a flow rate of 150 and 300 pl/s. When spraying continues for a long time, the thin liquid layer on the selected portion will form a drop

which will have no adverse effect on the spraying, and there will be no break down.

Table I Diameter of the selected portion in μm

5	Flow rate 300 pl/s				
	Distance [μm]	450	400	350	300
	Length of cone	262.5	236.25	236.25	225.75
	Distance* [μm]	187.5	163.75	113.75	74.25
	Pot.difference [Kv]	1.34	1.29	1.22	1.22
10	Diameter [μm]	450	390	340	300
	Flow rate 150 pl/s				
	Distance [μm]	450		350	300
	Length of cone [μm]	236.25		262.5	220.5
	Distance* [μm]	213.75		87.5	79.5
15	Pot.difference [Kv]	1.34		1.2	1.2
	Diameter [μm]	350		280	240

* Between tip of the conus of the liquid at the capillary and the substrate surface

20

Selected portions of the surface of the substrate A may also be coated with an oligonucleotide probe. In the present invention an oligonucleotide probe is understood to mean any nucleic acid polymer having a length that is suitable for the selective hybridization with a complementary RNA- or DNA-strand in a sample to be examined.

For a person skilled in the art it is obvious that many different methods that are generally known in the art can be used for performing assays with the method according to the present invention. For example, the selected portions may be provided with (monoclonal) antibodies that may or may not be different, and which are able to recognize an antigen (or a variety of antigens) to be detected. To the person skilled in the art it will be obvious that it is also possible to apply together with the liquid, reagents such as an enzyme substrate, or an agent for detecting the formation of a complex. Also, if the biological particle is to be immobilized, a substrate suitable for the application of the biological particle and known in the art will be used. The surface then may or

may not be capable of covalently binding this particle. For non-covalent immobilization of nucleic acids it is possible, for example, to use a gold surface.

The counter electrode may be a structure closed in itself whose centre, when projected onto the surface, will substantially coincide with the portion of the surface to be provided with the liquid. If the counter electrode is not located on the surface of the substrate, or if it is not held up to the same, so that it is therefore located between the substrate A and the second tip 3 of the capillary 1, then the surface of the cross section of the counter electrode will generally be smaller than the surface area of the selected portion. In most cases, the counter electrode will be an annular electrode, but other shapes, in particular rectangular counter electrodes are also possible. If a counter electrode is used that is not connected with the substrate, the counter electrode will generally be non-conductively connected with the capillary 1 in a permanent manner, and will preferably be adjustable at a distance from the second tip 3. This facilitates the reproducible application of liquid when a voltage is applied over the second tip 3 and the counter electrode.

If the liquid is to be applied to non-round portions of the surface, it is advisable to use a capillary and/or a counter electrode with a corresponding non-round shape. The counter electrode may be a non-flat counter electrode. With this type of counter electrode, the distance from any point of the electrode to the distal tip 3 of the capillary 1 is substantially constant.

Conceivably it is not the capillary 1 that is connected with the power source, but is the voltage between the second tip 3 and the counter electrode applied in a different manner. A possibility is, for example, that an electrode (not shown) is introduced in the liquid to be applied, which as the first electrode is connected to the high voltage source, and that the second electrode is formed by the substrate.

Such an embodiment may be especially useful when an array of capillaries is used, each of which is activated

by an individual voltage. In such a case the syringes individually may be driven by a pump. If there is a risk of the adjacent capillaries influencing each other, the distance between the capillaries may also be increased, such as to be doubled, and those portions of the surface that are not covered by a capillary may be provided with liquid, after the array or the substrate have been suitably translated.

When using more than one capillary the voltage between a first capillary and the substrate may have an opposite polarity to the one between an adjacent capillary and the substrate. More particularly, it is then possible to fill one selected portion of the surface with two (or more) capillaries. This further limits the spreading of liquid outside the selected portion. This relates both to the spreading of sprayed liquid and the liquid already applied. The neutralization also means that less or no transportation of charge at all is necessary through the substrate, which further increases the range of substrates that can be used without separate electrodes that have to be held against the surface. In the situation described here it may be favourable that the distal tips of the capillaries facing the substrate do not extend parallel with each other but under an angle. Preferably, they are both directed towards the centre of the selected portion. The employment (preferably simultaneously) of two (or more) capillaries for the application of liquid to a selected portion, also offers various possibilities for performing reactions between the different liquids supplied through the capillaries. Attention is drawn especially to the fact that liquids can be mixed exceedingly well with the method according to the invention.

The liquid(s) to be applied by the method according to the invention has to possess sufficient conductivity, as is well known in the art. As mentioned above, the liquid may contain reagents, but also reagents on carriers or carriers to which reagents have to be applied. By means of the method according to the invention it is, for example, possible to apply to a selected portion of the

substrate a colloidal solution of gold, latex or the like. Such substances are known to be excellent carriers for nucleic acid probes and antibodies.

In addition to varying the voltage or switching the spraying process on and off, it is also possible, simultaneously or alternatively, to increase the distance between capillary and substrate. Preferably this only takes a short time, such as a fraction of a second. It has been shown that increasing the distance does not substantially change the shape of the conus of the liquid, and that the application of the liquid is reproducible.

In order to have a reproducible starting-up behaviour and in general to maximize the control regarding the application, it may be advisable to obtain information about the liquid meniscus at the second tip 3. This can be done in different ways, for example by measuring the capacitance (by using an alternating current superposed on the high voltage direct current) or by optical means. In the latter case change in shape of the liquid meniscus may advantageously be used. For example, it is possible to couple light via the first tip 2 in the capillary 1, which capillary 1 works as wave conductor. The amount of light reflected by the meniscus is measured, to serve as parameter for operating the pump and for investigating the starting-up behaviour (the first forming of micro droplets). This behaviour will depend on the liquid used and the substances, such as salts, it comprises.

A suitable embodiment of the device for the application of the present invention is shown in Fig. 3. In a block of plastic 7 capillaries 1 have been provided. To this end for example, a flat side of a first plastic portion has been provided with slots, after which a second portion part is attached to the side with the slots thereby creating the capillaries 1. The plastic portions may be bonded, for example, by using adhesives or other techniques known in the art. The ducts may be provided with reservoirs 8 cut into a third plastic portion each of which, at a proximal side of the capillaries 1, are in communication with one capillary. The plastic parts may be

manufactured in any known suitable manner such as by injection moulding or hot embossing. The liquid may be displaced from a reservoir 8 by means of (gas) pressure serving all reservoirs 8 together or each reservoir individually.

At their distal end, the capillaries 1 are provided with orifices. This is preferably done by means of a chip provided with orifices with the aid of techniques known from the semiconductor industry. Conveniently, this chip is also provided with electrodes.

According to the invention, the counter electrode may cover the selected surface onto which liquid has to be applied, while the surface surrounding the selected surface conducts poorly or not at all. It is also possible that the selected surface is basically a surface that conducts poorly or not at all and that is provided with a large number of small electrodes distributed over the selected surface. Such embodiments can be manufactured by means of generally known production techniques for semiconductors.

A counter electrode may also be applied underneath the selected surface, which selected surface conducts poorly or not at all. However, the thickness of the thin film applied largely determines the amount of liquid that can be applied to the selected surface. In general, the thickness will be nominal. According to a special aspect of the invention this limitation, which results from a charge accumulation on the selected surface, may advantageously be used to economize on the amount of liquid applied to the selected surface.

The method according to the invention may also be used for the application of a liquid that solidifies at lower temperatures (such as agarose or the like) or that cures (for example, acrylamide), yielding an aqueous gel which provides a certain amount of form retention. Optionally the method according to the invention may be used to subsequently apply one or more further liquids, such as liquids comprising a reagent.

CLAIMS

1. A method of the dosed application of a liquid
5 onto a surface of a substrate, wherein the liquid is fed
to a distal tip of a capillary at a flow rate between 0,01
pl/s and 1 ml/s, wherein the distal tip comprises an ori-
fice directed toward a surface, the inside diameter of the
capillary is less than 150 μm and a voltage is applied
10 between the orifice and a counter electrode until the
desired amount of liquid has been applied to the selected
portion of the surface, **characterized** in that the distance
between the orifice and the surface is less than 2 mm.

2. A method according to claim 1, **characterized** in
15 that as substrate an object for performing an assay is
used.

3. A method according to claim 1 or 2, **character-**
ized in that the liquid comprises a biological particle
selected from a single-cell organism, an enzyme, a probe
20 for the detection of a nucleic acid sequence, an enzyme, a
receptor and a ligand.

4. A method according to claim 3, **characterized** in
that as the receptor an antibody is used.

5. A method according to one of the preceding
25 claims, **characterized** in that the flow rate varies between
1 pl/s and 1 nl/s, and preferably between 10 and 100 pl/s.

6. A method according to one of the preceding
claims, **characterized** in that the distance between the
orifice and the surface is 200 to 1000 μm .

30 7. A method according to one of the preceding
claims, **characterized** in that the selected portion of the
surface is bounded by means for limiting the spreading of
the liquid over the surface.

8. A method according to claim 7, **characterized** in
35 that a substrate is used whose surface comprises a well
with the selected portion being comprised of the bottom of
the well, wherein a wall of the well contains the spread-
ing of the liquid over the surface.

9. A method according to claim 7 or 8, **characterized** in that the means to avoid the liquid spreading over the surface is a barrier selected from i) a hydrophilic barrier and ii) a hydrophobic barrier.

5 10. A method according to one of the claims 7 to 9, **characterized** in that as means a charged barrier is used having a charge whose sign is the same as that of the liquid applied to the surface.

10 11. A method according to one of the preceding claims, **characterized** in that the application is performed in an atmosphere substantially saturated with vapour from the liquid.

15 12. A method according to one of the preceding claims, **characterized** in that the application is performed in an atmosphere which, in comparison with atmospheric air, reduces the chance of discharge.

20 13. A method according to one the preceding claims, **characterized** in that after the application of the liquid onto the selected portion of the surface, the substrate and the orifice are moved in relation to each other in a plane extending substantially perpendicular to the axis of the capillary, and in that a second selected portion of the surface is provided with liquid, which second selected portion does not overlap with the selected portion first
25 provided with liquid.

30 14. A method according to one the preceding claims, **characterized** in that an array of capillaries is used with the capillaries spaced from each other such that the selected surfaces onto which liquid is to be applied by two neighbouring capillaries, do not overlap.

 15. A method according to one the preceding claims, **characterized** in that the counter electrode is formed by the substrate.

35 16. A method according to one the claims 1 to 13, **characterized** in that an electrode is used as counter electrode, which electrode substantially surrounds the selected portion of the surface and which is retained in the vicinity of the surface.

17. A method according to one the preceding claims, characterized in that the amount of applied liquid is measured by means of current and/or voltage characteristics.

5 18. A method according to one the preceding claims, characterized in that a gelling liquid is applied to the selected portion of the surface.

10 19. A method according to one the preceding claims, characterized in that the counter electrode is applied underneath the selected surface and is covered with a substantially insulating thin film.

11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000 1001 1002 1003 1004 1005 1006 1007 1008 1009 1010 1011 1012 1013 1014 1015 1016 1017 1018 1019 1020 1021 1022 1023 1024 1025 1026 1027 1028 1029 1030 1031 1032 1033 1034 1035 1036 1037 1038 1039 1040 1041 1042 1043 1044 1045 1046 1047 1048 1049 1050 1051 1052 1053 1054 1055 1056 1057 1058 1059 1060 1061 1062 1063 1064 1065 1066 1067 1068 1069 1070 1071 1072 1073 1074 1075 1076 1077 1078 1079 1080 1081 1082 1083 1084 1085 1086 1087 1088 1089 1090 1091 1092 1093 1094 1095 1096 1097 1098 1099 1100 1101 1102 1103 1104 1105 1106 1107 1108 1109 1110 1111 1112 1113 1114 1115 1116 1117 1118 1119 1120 1121 1122 1123 1124 1125 1126 1127 1128 1129 1130 1131 1132 1133 1134 1135 1136 1137 1138 1139 1140 1141 1142 1143 1144 1145 1146 1147 1148 1149 1150 1151 1152 1153 1154 1155 1156 1157 1158 1159 1160 1161 1162 1163 1164 1165 1166 1167 1168 1169 1170 1171 1172 1173 1174 1175 1176 1177 1178 1179 1180 1181 1182 1183 1184 1185 1186 1187 1188 1189 1190 1191 1192 1193 1194 1195 1196 1197 1198 1199 1200 1201 1202 1203 1204 1205 1206 1207 1208 1209 1210 1211 1212 1213 1214 1215 1216 1217 1218 1219 1220 1221 1222 1223 1224 1225 1226 1227 1228 1229 1230 1231 1232 1233 1234 1235 1236 1237 1238 1239 1240 1241 1242 1243 1244 1245 1246 1247 1248 1249 1250 1251 1252 1253 1254 1255 1256 1257 1258 1259 1260 1261 1262 1263 1264 1265 1266 1267 1268 1269 1270 1271 1272 1273 1274 1275 1276 1277 1278 1279 1280 1281 1282 1283 1284 1285 1286 1287 1288 1289 1290 1291 1292 1293 1294 1295 1296 1297 1298 1299 1300 1301 1302 1303 1304 1305 1306 1307 1308 1309 1310 1311 1312 1313 1314 1315 1316 1317 1318 1319 1320 1321 1322 1323 1324 1325 1326 1327 1328 1329 1330 1331 1332 1333 1334 1335 1336 1337 1338 1339 1340 1341 1342 1343 1344 1345 1346 1347 1348 1349 1350 1351 1352 1353 1354 1355 1356 1357 1358 1359 1360 1361 1362 1363 1364 1365 1366 1367 1368 1369 1370 1371 1372 1373 1374 1375 1376 1377 1378 1379 1380 1381 1382 1383 1384 1385 1386 1387 1388 1389 1390 1391 1392 1393 1394 1395 1396 1397 1398 1399 1400 1401 1402 1403 1404 1405 1406 1407 1408 1409 1410 1411 1412 1413 1414 1415 1416 1417 1418 1419 1420 1421 1422 1423 1424 1425 1426 1427 1428 1429 1430 1431 1432 1433 1434 1435 1436 1437 1438 1439 1440 1441 1442 1443 1444 1445 1446 1447 1448 1449 1450 1451 1452 1453 1454 1455 1456 1457 1458 1459 1460 1461 1462 1463 1464 1465 1466 1467 1468 1469 1470 1471 1472 1473 1474 1475 1476 1477 1478 1479 1480 1481 1482 1483 1484 1485 1486 1487 1488 1489 1490 1491 1492 1493 1494 1495 1496 1497 1498 1499 1500 1501 1502 1503 1504 1505 1506 1507 1508 1509 1510 1511 1512 1513 1514 1515 1516 1517 1518 1519 1520 1521 1522 1523 1524 1525 1526 1527 1528 1529 1530 1531 1532 1533 1534 1535 1536 1537 1538 1539 1540 1541 1542 1543 1544 1545 1546 1547 1548 1549 1550 1551 1552 1553 1554 1555 1556 1557 1558 1559 1560 1561 1562 1563 1564 1565 1566 1567 1568 1569 1570 1571 1572 1573 1574 1575 1576 1577 1578 1579 1580 1581 1582 1583 1584 1585 1586 1587 1588 1589 1590 1591 1592 1593 1594 1595 1596 1597 1598 1599 1600 1601 1602 1603 1604 1605 1606 1607 1608 1609 1610 1611 1612 1613 1614 1615 1616 1617 1618 1619 1620 1621 1622 1623 1624 1625 1626 1627 1628 1629 1630 1631 1632 1633 1634 1635 1636 1637 1638 1639 1640 1641 1642 1643 1644 1645 1646 1647 1648 1649 1650 1651 1652 1653 1654 1655 1656 1657 1658 1659 1660 1661 1662 1663 1664 1665 1666 1667 1668 1669 1670 1671 1672 1673 1674 1675 1676 1677 1678 1679 1680 1681 1682 1683 1684 1685 1686 1687 1688 1689 1690 1691 1692 1693 1694 1695 1696 1697 1698 1699 1700 1701 1702 1703 1704 1705 1706 1707 1708 1709 1710 1711 1712 1713 1714 1715 1716 1717 1718 1719 1720 1721 1722 1723 1724 1725 1726 1727 1728 1729 1730 1731 1732 1733 1734 1735 1736 1737 1738 1739 1740 1741 1742 1743 1744 1745 1746 1747 1748 1749 1750 1751 1752 1753 1754 1755 1756 1757 1758 1759 1760 1761 1762 1763 1764 1765 1766 1767 1768 1769 1770 1771 1772 1773 1774 1775 1776 1777 1778 1779 1780 1781 1782 1783 1784 1785 1786 1787 1788 1789 1790 1791 1792 1793 1794 1795 1796 1797 1798 1799 1800 1801 1802 1803 1804 1805 1806 1807 1808 1809 1810 1811 1812 1813 1814 1815 1816 1817 1818 1819 1820 1821 1822 1823 1824 1825 1826 1827 1828 1829 1830 1831 1832 1833 1834 1835 1836 1837 1838 1839 1840 1841 1842 1843 1844 1845 1846 1847 1848 1849 1850 1851 1852 1853 1854 1855 1856 1857 1858 1859 1860 1861 1862 1863 1864 1865 1866 1867 1868 1869 1870 1871 1872 1873 1874 1875 1876 1877 1878 1879 1880 1881 1882 1883 1884 1885 1886 1887 1888 1889 1890 1891 1892 1893 1894 1895 1896 1897 1898 1899 1900 1901 1902 1903 1904 1905 1906 1907 1908 1909 1910 1911 1912 1913 1914 1915 1916 1917 1918 1919 1920 1921 1922 1923 1924 1925 1926 1927 1928 1929 1930 1931 1932 1933 1934 1935 1936 1937 1938 1939 1940 1941 1942 1943 1944 1945 1946 1947 1948 1949 1950 1951 1952 1953 1954 1955 1956 1957 1958 1959 1960 1961 1962 1963 1964 1965 1966 1967 1968 1969 1970 1971 1972 1973 1974 1975 1976 1977 1978 1979 1980 1981 1982 1983 1984 1985 1986 1987 1988 1989 1990 1991 1992 1993 1994 1995 1996 1997 1998 1999 2000 2001 2002 2003 2004 2005 2006 2007 2008 2009 2010 2011 2012 2013 2014 2015 2016 2017 2018 2019 2020 2021 2022 2023 2024 2025 2026 2027 2028 2029 2030 2031 2032 2033 2034 2035 2036 2037 2038 2039 2040 2041 2042 2043 2044 2045 2046 2047 2048 2049 2050 2051 2052 2053 2054 2055 2056 2057 2058 2059 2060 2061 2062 2063 2064 2065 2066 2067 2068 2069 2070 2071 2072 2073 2074 2075 2076 2077 2078 2079 2080 2081 2082 2083 2084 2085 2086 2087 2088 2089 2090 2091 2092 2093 2094 2095 2096 2097 2098 2099 2100 2101 2102 2103 2104 2105 2106 2107 2108 2109 2110 2111 2112 2113 2114 2115 2116 2117 2118 2119 2120 2121 2122 2123 2124 2125 2126 2127 2128 2129 2130 2131 2132 2133 2134 2135 2136 2137 2138 2139 2140 2141 2142 2143 2144 2145 2146 2147 2148 2149 2150 2151 2152 2153 2154 2155 2156 2157 2158 2159 2160 2161 2162 2163 2164 2165 2166 2167 2168 2169 2170 2171 2172 2173 2174 2175 2176 2177 2178 2179 2180 2181 2182 2183 2184 2185 2186 2187 2188 2189 2190 2191 2192 2193 2194 2195 2196 2197 2198 2199 2200 2201 2202 2203 2204 2205 2206 2207 2208 2209 2210 2211 2212 2213 2214 2215 2216 2217 2218 2219 2220 2221 2222 2223 2224 2225 2226 2227 2228 2229 2230 2231 2232 2233 2234 2235 2236 2237 2238 2239 2240 2241 2242 2243 2244 2245 2246 2247 2248 2249 2250 2251 2252 2253 2254 2255 2256 2257 2258 2259 2260 2261 2262 2263 2264 2265 2266 2267 2268 2269 2270 2271 2272 2273 2274 2275 2276 2277 2278 2279 2280 2281 2282 2283 2284 2285 2286 2287 2288 2289 2290 2291 2292 2293 2294 2295 2296 2297 2298 2299 2300 2301 2302 2303 2304 2305 2306 2307 2308 2309 2310 2311 2312 2313 2314 2315 2316 2317 2318 2319 2320 2321 2322 2323 2324 2325 2326 2327 2328 2329 2330 2331 2332 2333 2334 2335 2336 2337 2338 2339 2340 2341 2342 2343 2344 2345 2346 2347 2348 2349 2350 2351 2352 2353 2354 2355 2356 2357 2358 2359 2360 2361 2362 2363 2364 2365 2366 2367 2368 2369 2370 2371 2372 2373 2374 2375 2376 2377 2378 2379 2380 2381 2382 2383 2384 2385 2386 2387 2388 2389 2390 2391 2392 2393 2394 2395 2396 2397 2398 2399 2400 2401 2402 2403 2404 2405 2406 2407 2408 2409 2410 2411 2412 2413 2414 2415 2416 2417 2418 2419 2420 2421 2422 2423 2424 2425 2426 2427 2428 2429 2430 2431 2432 2433 2434 2435 2436 2437 2438 2439 2440 2441 2442 2443 2444 2445 2446 2447 2448 2449 2450 2451 2452 2453 2454 2455 2456 2457 2458 2459 2460 2461 2462 2463 2464 2465 2466 2467 2468 2469 2470 2471 2472 2473 2474 2475 2476 2477 2478 2479 2480 2481 2482 2483 2484 2485 2486 2487 2488 2489 2490 2491 2492 2493 2494 2495 2496 2497 2498 2499 2500 2501 2502 2503 2504 2505 2506 2507 2508 2509 2510 2511 2512 2513 2514 2515 2516 2517 2518 2519 2520 2521 2522 2523 2524 2525 2526 2527 2528 2529 2530 2531 2532 2533 2534 2535 2536 2537 2538 2539 2540 2541 2542 2543 2544 2545 2546 2547 2548 2549 2550 2551 2552 2553 2554 2555 2556 2557 2558 2559 2560 2561 2562 2563 2564 2565 2566 2567 2568 2569 2570 2571 2572 2573 2574 2575 2576 2577 2578 2579 2580 2581 2582 2583 2584 2585 2586 2587 2588 2589 2590 2591 2592 2593 2594 2595 2596 2597 2598 2599 2600 2601 2602 2603 2604 2605 2606 2607 2608 2609 2610 2611 2612 2613 2614 2615 2616 2617 2618 2619 2620 2621 2622 2623 2624 2625 2626 2627 2628 2629 2630 2631 2632 2633 2634 2635 2636

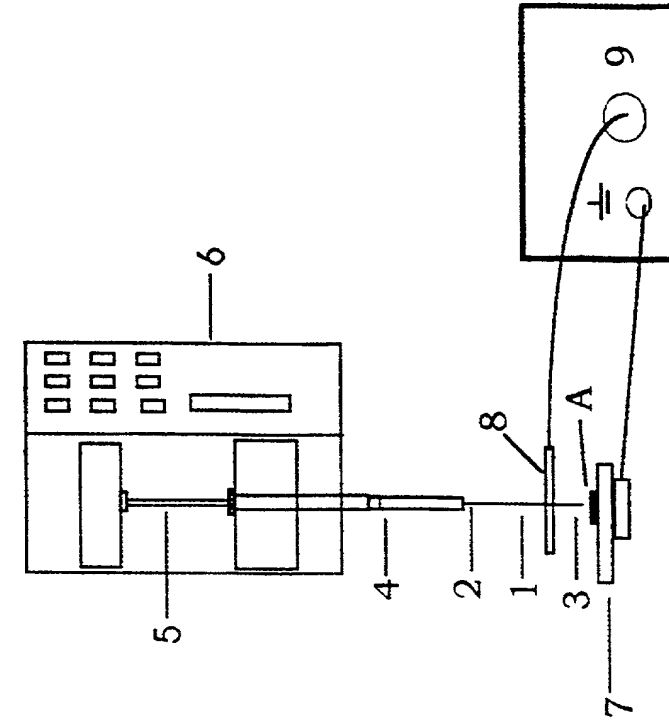


fig. 1.

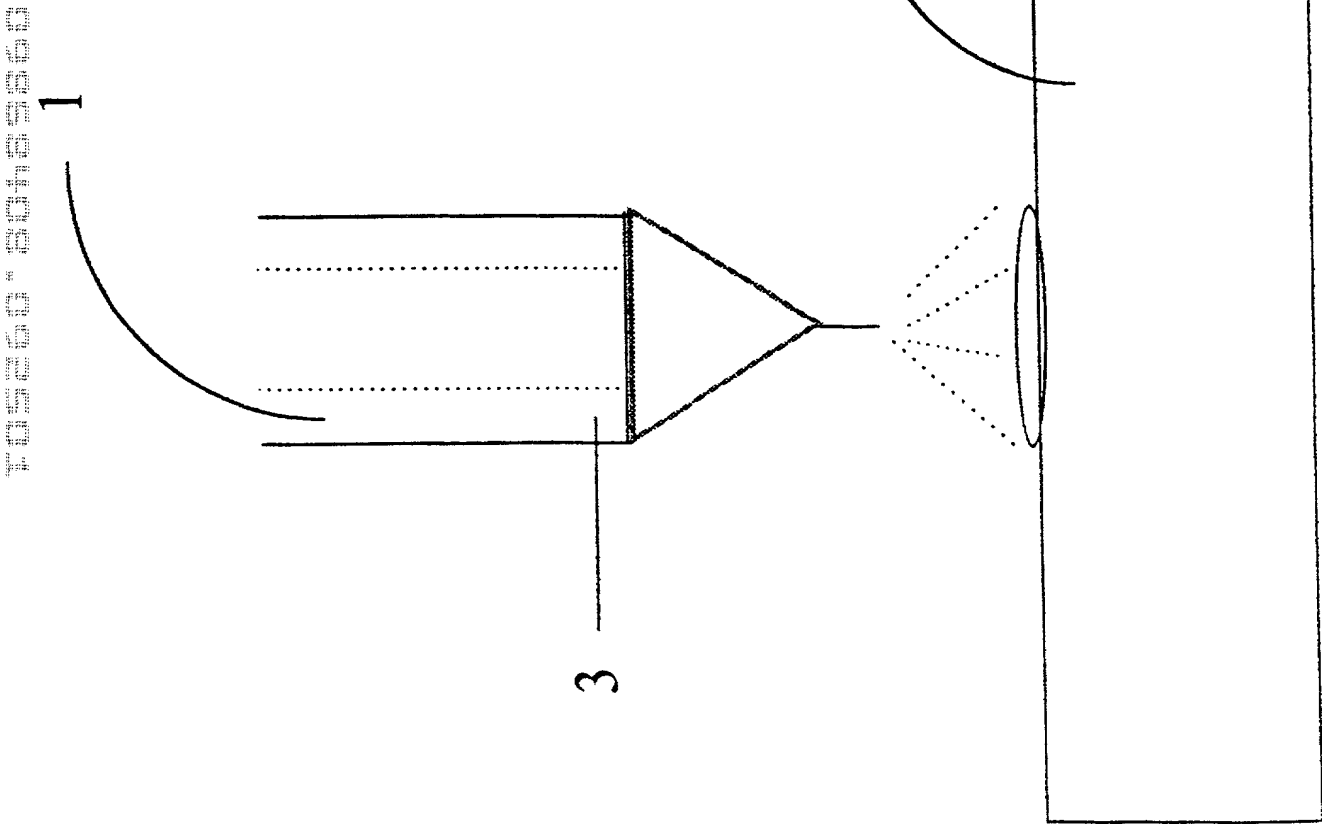


fig. 2.

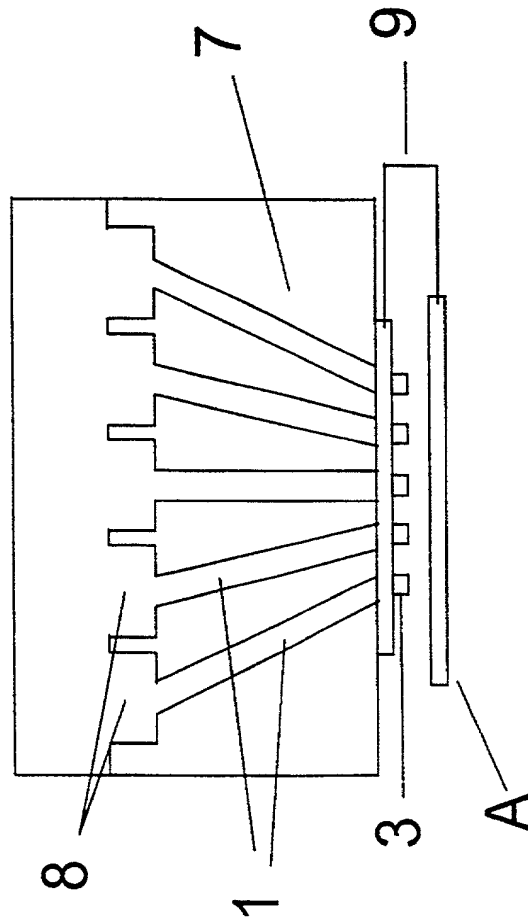


fig. 3.

Docket No.

30394-1049

Declaration and Power of Attorney For Patent Application

English Language Declaration

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

METHOD OF THE DOSED APPLICATION OF A LIQUID ONTO A SURFACE

the specification of which

(check one)

☐ is attached hereto.

☒ was filed on June 14, 2001 & Dec 17 1999 as United States Application No. or PCT International Application Number 09/ 868 ,408 and PCT/NL/99/007986 and was amended on _____ (if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) or Section 365(b) of any foreign application(s) for patent or inventor's certificate, or Section 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate or PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)

Priority Not Claimed

PCT/NL99/00786

PCT

17 December 1999

☐

(Number)

(Country)

(Day/Month/Year Filed)

NL 1010833

Netherlands

17 December 1998

☐

(Number)

(Country)

(Day/Month/Year Filed)

☐

(Number)

(Country)

(Day/Month/Year Filed)

I hereby claim the benefit under 35 U.S.C. Section 119(e) of any United States provisional

(Application Serial No.)

(Filing Date)

(Application Serial No.)

(Filing Date)

(Application Serial No.)

(Filing Date)

I hereby claim the benefit under 35 U. S. C. Section 120 of any United States application(s), or Section 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. Section 112, I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, C. F. R., Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. *(list name and registration number)*

JEFFREY D. MYERS, Reg. No. 35,964

Send Correspondence to: **CUSTOMER NO. 005179**

Direct Telephone Calls to: *(name and telephone number)*

Firm (505) 998-1500; Jeffrey D. Myers (505) 998-1502

Full name of sole or first inventor

Robert MOERMAN

Sole or first inventor's signature

Robert Moerman

Date

16-07-01

Residence

Den Haag, the Netherlands

NLX

Citizenship

Dutch

Post Office Address

Frankenslag 337

NL-2582 HN Den Haag, the Netherlands

Full name of second inventor, if any

Johannes FRANK

Second inventor's signature

Johannes Frank

Date

17-07-01

Residence

Schiedam, the Netherlands

NLX

Citizenship

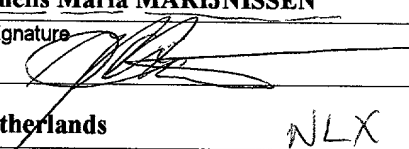
Dutch

Post Office Address

Hooiland 14

NL-3121 XD Schiedam, the Netherlands

3-00

Full name of third inventor, if any Johannes Cornelis Maria MARIJNISSEN	
Third inventor's signature 	Date 16/07/2001
Residence Breda, the Netherlands NLX	
Citizenship Dutch	
Post Office Address Zaart 11	
NL-4819 ED Breda, the Netherlands	

Full name of fourth inventor, if any	
Fourth inventor's signature	Date
Residence	
Citizenship	
Post Office Address	

Full name of fifth inventor, if any	
Fifth inventor's signature	Date
Residence	
Citizenship	
Post Office Address	

Full name of sixth inventor, if any	
Sixth inventor's signature	Date
Residence	
Citizenship	
Post Office Address	